



KESSEBÖHMER
CLEVER STORAGE



TopFlex

**EXTRA WORKING
SPACE ON CALL.**



FEATURES & BENEFITS:

- Modular for easy assembly
- Payload: 30 kg
- Available with retractable or fixed front



INVISIBLE AND SPACE-SAVING: TopFlex


CUSTOMER-SPECIFIC CHOICE OF WIDTH



WHEN NOT IN USE, THE EXTENDABLE TABLE SECTIONS ARE CONCEALED BEHIND A DRAWER FRONT. As TopFlex is pulled out, the drawer front drops down automatically. The table sections slide effortlessly into place. Partially extended, TopFlex is already a usable surface.

Fully extended, the two sections plus the drop-down front and the flush-mounted runner create a streamlined table surface. A TopFlex extension fitting can support different table widths. It can be integrated into any base unit between 45 cm and 90 cm. TopFlex is available with a drop-down front or a fixed front.

[kesseboehmer.com/topflex](https://www.kesseboehmer.com/topflex) 

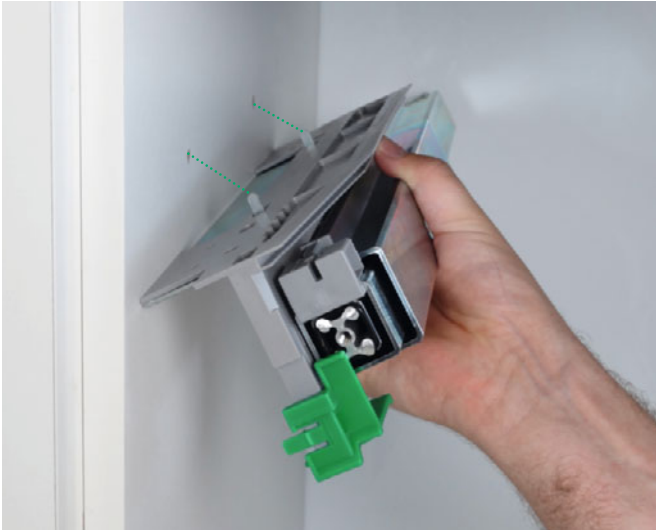

Position metal fitting – guide pins hold it ...



... for easy fixing.



Remove transportation lock.



Click front into place and fix it.

SO SIMPLE: TopFlex Mounting

IT CAN BE INTEGRATED INTO ANY BASE UNIT
BETWEEN 45 CM AND 90 CM

Worktop extension fitting

TopFlex

drop-down front, cantilevered, complete,

with white worktop,

Corpus depth: ≥ 500 mm

Extended length: : 810 mm

Load capacity: max. 30 kg

For side panel	Corpus width (mm)	Art. no.
16 mm	500	00 5230
	600	00 5231
	900	00 5232
19 mm	500	00 5240
	600	00 5241
	900	00 5242



Worktop extension fitting

TopFlex

fixed front, cantilevered, complete,

with white worktop,

Corpus depth: ≥ 500 mm

Extended length: : 810 mm

Load capacity: max. 30 kg

For side panel	Corpus width (mm)	Art. no.
16 mm	500	00 5233
	600	00 5234
	900	00 5235
19 mm	500	00 5243
	600	00 5244
	900	00 5245



Worktop extension fitting

TopFlex

drop-down front, cantilevered,
complete, **without** worktop
for worktops 15-19 mm thick

Load capacity: max. 30 kg

Dimensions (mm)	Art. no.
cabinet width: 450-900	00 5236
extended length: 810	
cabinet depth: ≥ 500	



Worktop extension fitting

TopFlex

fixed front, cantilevered,
complete, **without** worktop
for worktops 15-19 mm thick

Load capacity: max. 30 kg

cabinet width: 450-900	00 5238
extended length: 810	
cabinet depth: ≥ 500	





KESSEBÖHMER
CLEVER STORAGE



159334_0000